




# Outdoor Display Board

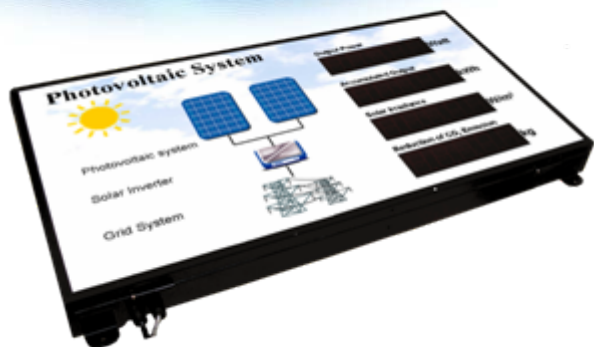

In some cases, customer needs a outdoor display board to display the solar system production information. GEOPROTEK provide display board that can connect to GS Logger or PC via RS-485. The board display output power, accumulated output, solar irradiance and reduction of CO2 emission with IP 65 water proof covering.

## Specifications:

Communication	RS485
Seven-segment displays size	2.3 inch
Display Digit	5 digits
Board Size	1200X900X100 mm
Water Proof	IP 65
Fix Method	Wall Mount
RS-485 settings	Address 1 ~ FF Baud Rate: 9600,N.8.1 Protocol Modbus RTU Mode

## Dimension:

